

Art. 133C

Attuatore pneumatico verticale semplice effetto

Vertical pneumatic cylinder s. e.

Verin pneumatique vertical s. e.

Vertikal pneumatischer Antrieb l. f.


Art. 133C

Attuatore pneumatico verticale doppio effetto

Vertical pneumatic cylinder d. e.

Verin pneumatique vertical d. e.

Vertikal pneumatischer Antrieb l. l.

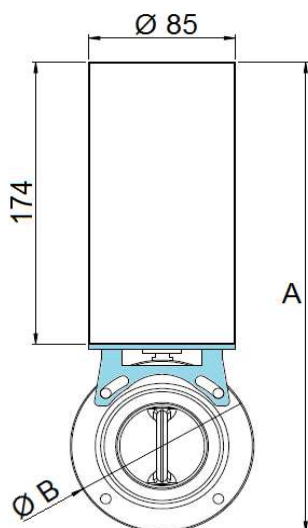

DN	25	32	40	50	65	80
A	263	270	280	293	317	330
B	28	34	40	52	70	85
tempo di apertura/chiusura opening / closing time	1,5 sec					
peso/weight/poids/gewicht	3,85 Kg					
coppia max / torque max	20 Nm					
fluido	aria compressa					
pressione esercizio	5 - 9 bar					
connessione pneumatica	g 1/8" (tubo 6 mm)					
materiale	Aisi 304					
temperatura max esercizio	70° C					

Accessori disponibili / Available accessories / Accessoires disponibles / Verfügbares Zubehör:

- Box Micro meccanico con elettrovalvola monostabile (SE) / Limit switch box (mechanical) with solenoid valve
- Micro induttivi esterni / external inductive micro switches